

Stainless Steel Door Protection Barrier

Part Number DP9


Features

This door barrier can incorporate a push pad fixing for door operation or access scanning. Suitable for floor to wall fixing.

Commercial heavy-duty specification made from 129mm diameter tube with a strong 2mm wall thickness.

Fine satin brushed finish to Ra.5 as standard.

Fully glazed toughened glass utilizing a unique custom extruded rubber seal, which eliminates the possibility of finger trapping. This design also prevents cycle locking, ensuring doorways remain clear.

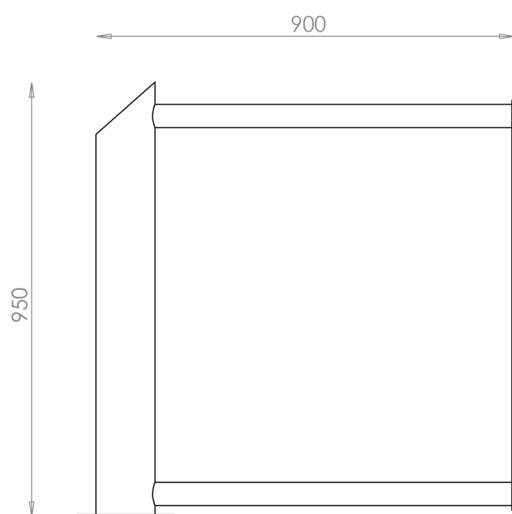

Options

- Unglazed versions can be supplied
- Stainless steel grade 304 or 316.
- Any width or height can be produced.
- Mountings for door actuation control gear can be added.

Fixings required

3 qty 10mm diameter anchor bolts, which can be supplied at extra cost.

Simbars UK Ltd.

46 Ashton Vale Rd,
Bristol,
BS3 2HQ

tel: 0117 953 1444

email: martin@simbars.co.uk

www.simbars.co.uk